



SV1720D-PLS2		
Continuous Torque	2.08	in-lb
	33	oz-in
	0.24	N-m
Peak Torque	3.82	in-lb
	61	oz-in
	0.43	N-m
Nominal Continuous Power	145	Watt
No Load Speed	7,900	RPM
Continuous Current @ Nominal Power	4.5	Amps
Voltage Constant	5.5	V/kRPM
Winding Resistance	1.8	ohms
Encoder Resolution	4,000	Counts/Rev
Rotor Inertia	0.00026	oz-in-sec ²
	0.184	10 ⁻⁶ Kg-m ²
Weight	1.2	lb
	0.55	kg
Shaft Diameter	0.197	in
	5.00	mm
Shaft, Radial Load	7	lb
	3.18	kg
Shaft, Axial Thrust Load	3	lb
	1.36	kg
EtherNet Available		
DeviceNet Available		
ProfiBus Available		
CanOpen Available		




Servida Motor SV1720D-PLS2 (No Options) CAD Drawing

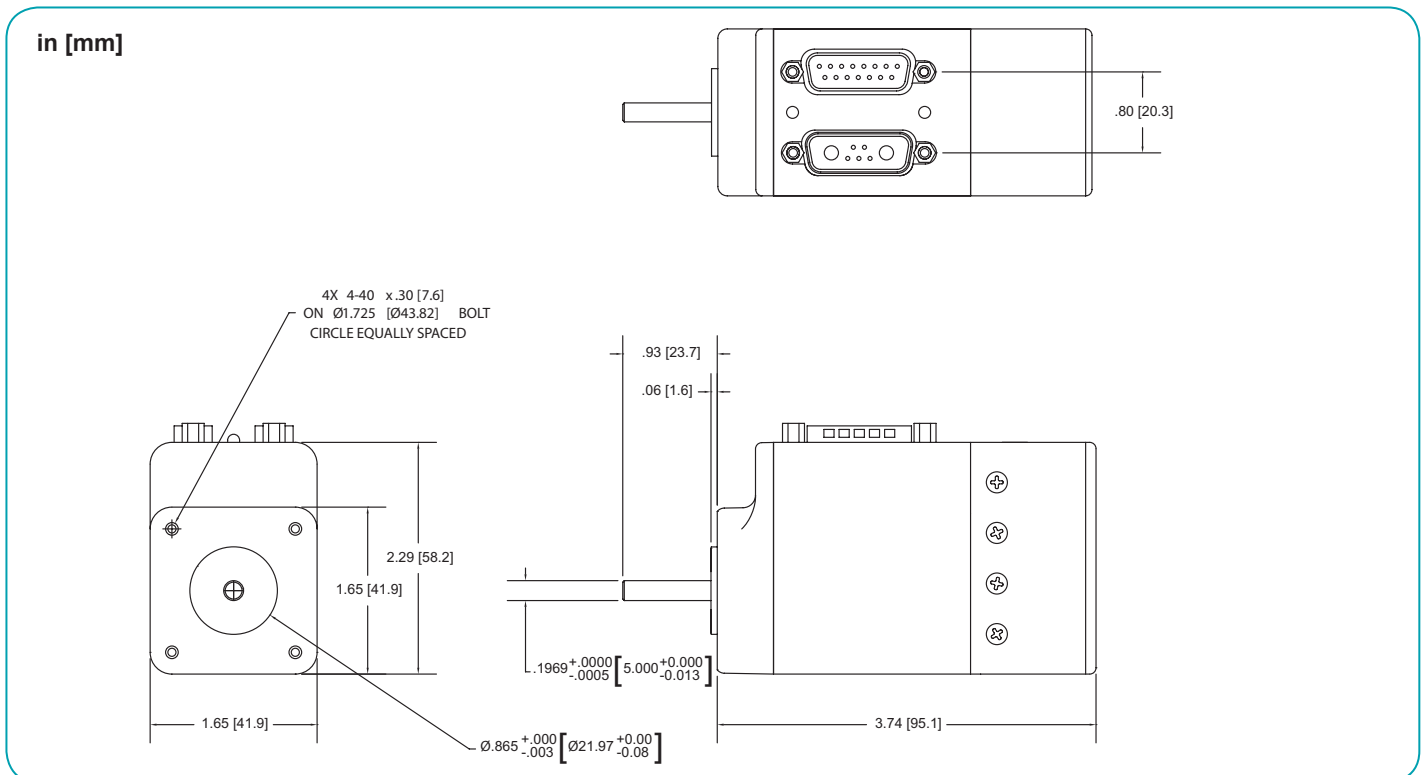


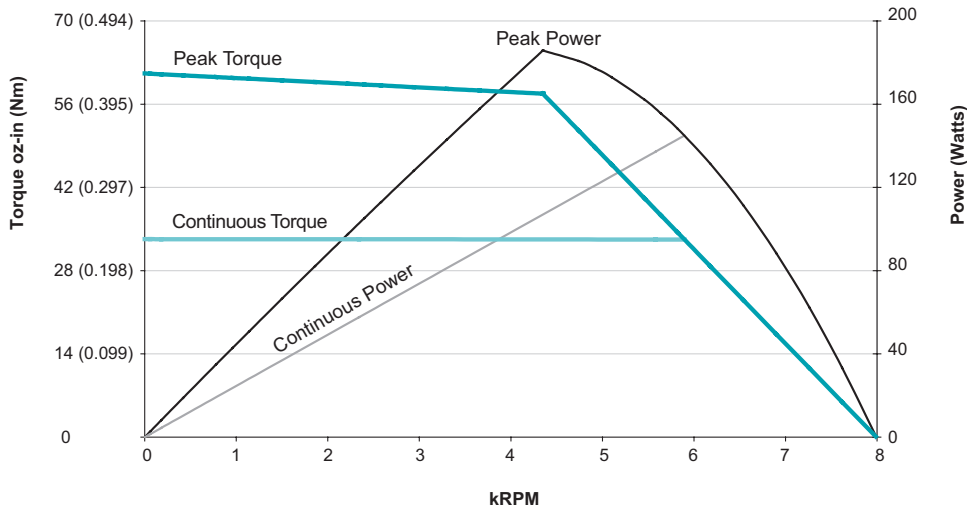

**SV1720D-PLS2
at 48 VDC
at rise to 85°C**

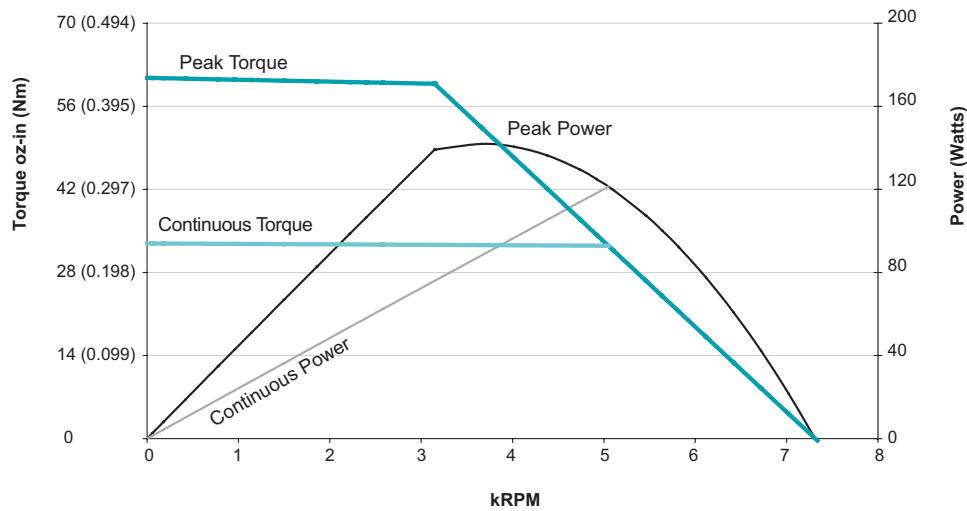

**SV1720D-PLS2
at 42 VDC
at rise to 85°C**

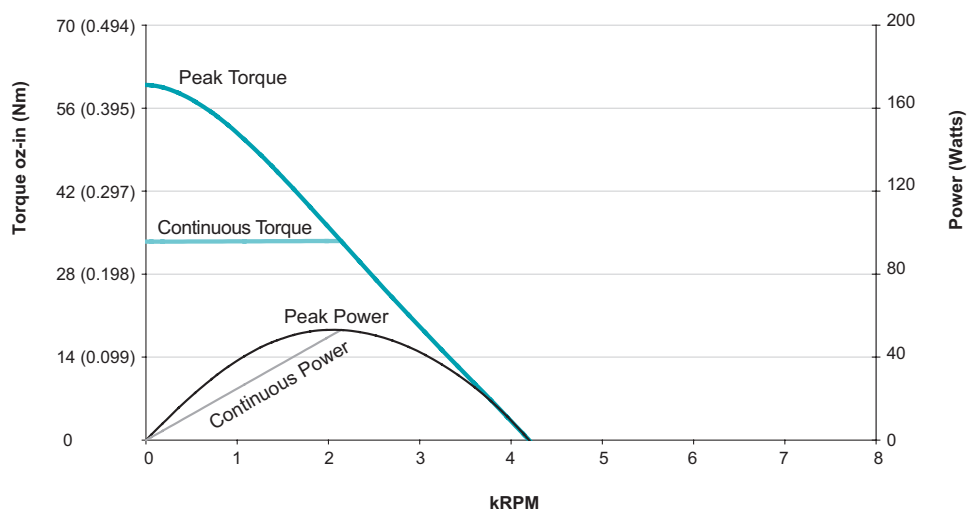

**SV1720D-PLS2
at 24 VDC
at rise to 85°C**